


Fire Panels - Accessories

Addressable Manual Call Point with Isolator

Model 4433

- Attractive design compliant with EN54-11
- Test key for routine testing without breaking the frangible element
- Built-in short-circuit isolator
- Protection against accidental operation

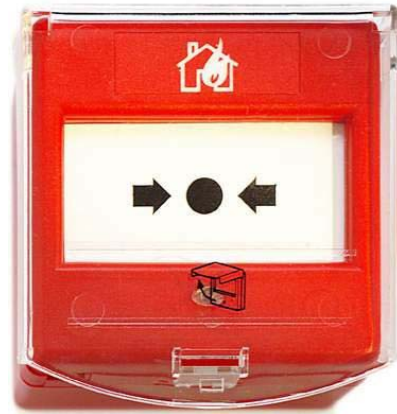

General

The manual call point (m.c.p.) has an attractive design compliant with EN54-11, and is either surface mounted in the supplied red back-box. To operate the m.c.p. the frangible element is pressed until it is broken. This will activate the built-in microswitch, which will generate a fire alarm in the c.i.e. The frangible element is easily replaced. The m.c.p. also has a built-in short-circuit isolator.

Test / cover removal key

Routine testing is made without breaking the frangible element by inserting a supplied test key. The m.c.p. will be reset when the test key is pulled out. The test key is also used for the front cover removal.

Protective cover

To protect the m.c.p. against accidental operation, a transparent polycarbonate flap has to be lifted for access to the frangible element.

LED indicator on the front

LED steady on indicates that the m.c.p. is operated, i.e. fire alarm is activated in the c.i.e.

Flashing LED, see **Connection / Settings**.

Built-in isolator

The isolator, compliant with EN54-17, will divide the COM loop into **segments**, i.e. between two isolators or between an isolator and the c.i.e.

In case of a COM loop short-circuit only the affected segment will be disabled. Depending on the mode, the isolator will be in use or not.

Connection / Settings

The m.c.p. and the isolator takes only **one** COM loop address. The mode of addressing and technical address are set with the address setting tool 3314/4414 as follow:

- **NORMAL** mode, only if isolator is required, type must be programmed as 4439. Valid for FT1020G3 and FT128 software version ≥ 2.0
- **2330** used if the isolator is not required. Must be programmed as 3339 via EBLWin or WING3/512/128

Two flying leads (wires) are connected to the terminal block and shall be used for the address setting tool's connection cables only. The wires shall be disconnected before the COM loop wires are connected.

Product applications

Used in the systems FT128 / FT512 / FT1020G3 and is intended for indoor use in dry premises.



Panasonic

Fire System Technology

Australia Head Office: 4 Pike Street Rydalmere NSW 2116
Ph+61 2 9684 1466 **Fx**+61 2 9684 4146 **Toll Free** 1300 78 FIRE


New Zealand Unit 106, The Zone, 23 Edwin Street Mount Eden 1024
Ph+64 9 638 4644 **Fx**+64 9 6384645 **Toll Free** 0800 220 007

Web: www.brooks.com.au (Aus) www.brooks.co.nz (NZ)

E & OE. As our policy is one of continuous product development, we reserve the right to alter product details without prior notice. DS44333 14/02/14

Type numbers

4433	Addressable manual call point with Isolator
2347	Replacement glass (10 pcs.)
2348	Replacement polycarbonate cover (10 pcs.)

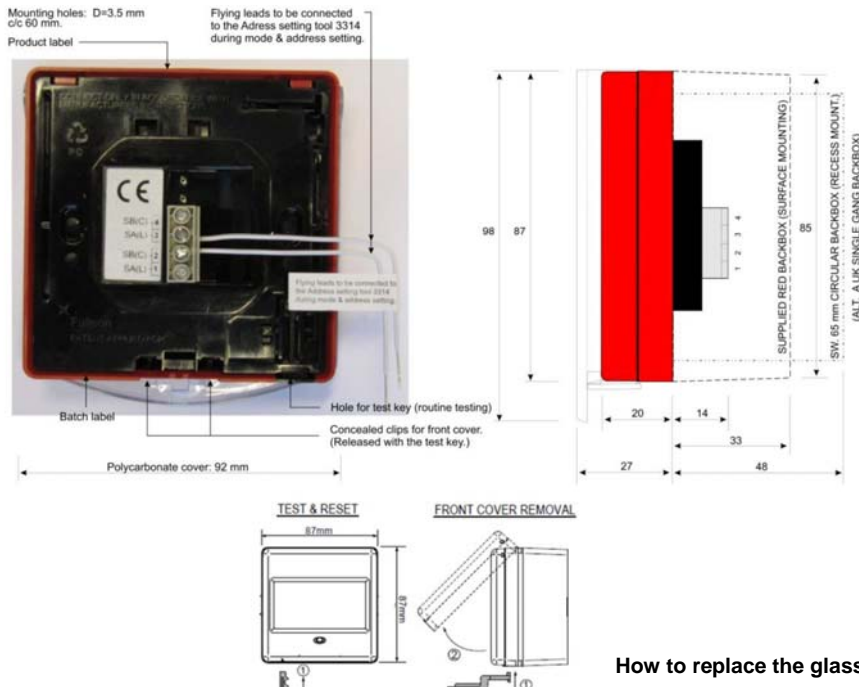

How to replace the glass element

Lift the polycarbonate flap.

- Release the front cover security clips with the test key.
- Lift and remove the front cover. Remove the broken glass element. Place the top edge of the replacement glass element against the micro switch plunger and push it upwards until the glass element is in correct position.

Put back the front cover and lower the polycarbonate flap. Perform a routine test

How to perform routine testing

- ① Insert the test key into the hole in the front cover.

The glass position will change, indicating that the call point is operated.

Wait until the LED is turned on, i.e. fire alarm is activated in the c.i.e.

- ② Pull out the test key and the glass position will return to normal.

The LED will be turned off when the fire alarm is reset in the c.i.e.

Technical data

Voltage (V DC)	
allowed	12-30
nominal	24
Current consumption at nom. volt. from COM loop (mA)	
quiescent / active	1.6 / 2.7
Ambient temperature (°C)	
operating / storage	-10 to +55 / -40 to +85
Ambient humidity (% RH)	max. 90, non condensing
Ingress Protection rating	IP42
Weight (g)	M.c.p. 140 / Back-box 60
Construction / Colour	ABS / Red (ISO 3864)
Approvals	CE: 13 EC Certificate no. 0786-CPD-21235. EN54-11:2001 + and EN54-17:2005 + AC:2007



Panasonic

Fire System Technology

All technical features and data are subject to changes without notice, resulting from continuous development and improvement.

Australia Head Office: 4 Pike Street Rydalmere NSW 2116
Ph+61 2 9684 1466 **Fx**+61 2 9684 4146 **Toll Free** 1300 78 FIRE

New Zealand Unit 106, The Zone, 23 Edwin Street Mount Eden 1024
Ph+64 9 638 4644 **Fx**+64 9 6384645 **Toll Free** 0800 220 007

Web: www.brooks.com.au (Aus) www.brooks.co.nz (NZ)

E & OE. As our policy is one of continuous product development, we reserve the right to alter product details without prior notice. DS44333 14/02/14