
DATASHEET

Combination Heat Detector

- Conventional heat detector
- Rate-of-rise and fixed temperature alarm levels

GENERAL

Heat detector 4318 is a conventional combination heat detector, class A1R. It "gives an alarm" at a certain fixed temperature (59°C) and/or at a certain temperature rise, "rate-of-rise" function.

The sensing element is a thermistor.

The detector is plugged in a conventional base 2324 connected to a conventional zone line input.

The base has an LED that will light when the detector goes into alarm. In the base there are terminals to connect an external remote indicator.

ENVIRONMENTALLY FRIENDLY

The detector has unleaded soldering. The latest IC technology reduces the number of semiconductors and other electronic components to a minimum.

PRODUCT APPLICATIONS

This conventional heat detector can be used in the **Firetracker 512 & Firetracker 128**.

The detector is intended for indoor use and in dry premises. Heat detectors are normally used in small rooms where the temperature can be expected to rise rapidly in case of a fire or places where smoke detectors cannot be used.

TYPE NUMBER

4318 - Combination heat detector



TECHNICAL DATA

Model Number **4318**

Voltage (V DC)
 Rated 24
 allowed 10-30
 normal 24

Current consumption at nom. volt. (mA) For more details see **Firetracker 512 & Firetracker 128** Planning Instructions.

Quiescent (detector only) 0.015

Active (detector only) min. 3

Ambient temperature (°C)
 Operating -10 to +50
 Storage -25 to +70

Application temperature class A1 (°C)
 typical / max. +25 / +50

Ambient humidity (% RH) max. 95, non condensing

Ingress Protection rating (estimated) IP51


Alarm temp. (T=°C; deltaT=°C/168s) 59; 18 (T=static response temp. Class A1 T^{min}=54; T^{max}=65.)

Size w x h (mm) 102 x 39


Weight **54g**

Construction / Colour Modified polycarbonate / Grey (N8, Muncell colour code)

Approvals 07 EC Certificate no. 0845-CPD-232.1566; EN54-5, class A1R. AS7240.5.

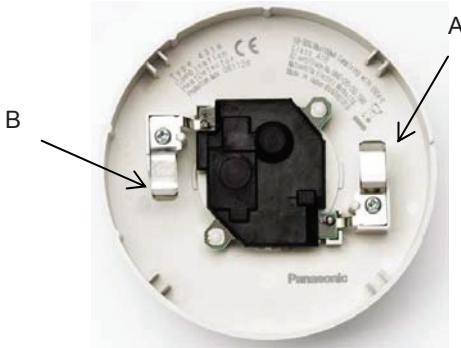

The zone line is connected to the base 2324 (A-B)
 Ext. LED is connected to the base 2324 (A-L).

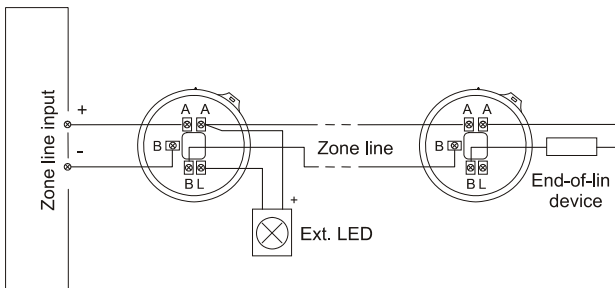

In the detector: See also "Engineering Instructions for detectors Type 435x".

A Contact for base 2324

B Contact for base 2324

The detector is plugged in a base 2324.
 End-of-line device depending on the zone line input.