

Fire Detectors

Combination Heat Detector

Model 4318

- Conventional heat detector
- Rate-of-rise and fixed temperature alarm levels



General

Heat detector 4318 is a conventional combination heat detector, class A1R. It "gives an alarm" at a certain fixed temperature (59°C) and/or at a certain temperature rise, "rate-of-rise" function.

The sensing element is a thermistor.

The detector is plugged in a conventional base 2324 connected to a conventional zone line input.

The base has an LED that will light when the detector goes into alarm. In the base there are terminals to connect an external remote indicator.

Environmentally Friendly

The detector has unleaded soldering. The latest IC technology reduces the number of semiconductors and other electronic components to a minimum.

Product applications

This conventional heat detector can be used in the **Firetracker 512** & **Firetracker 128**.

The detector is intended for indoor use and in dry premises. Heat detectors are normally used in small rooms where the temperature can be expected to rise rapidly in case of a fire or places where smoke detectors cannot be used.



Panasonic

Fire System Technology

Australia Head Office: 4 Pike Street Rydalmere NSW 2116
Ph+61 2 9684 1466 **Fx**+61 2 9684 4146 **Toll Free** 1300 78 FIRE


New Zealand Unit 106, The Zone, 23 Edwin Street Mount Eden 1024
Ph+64 9 638 4644 **Fx**+64 9 6384645 **Toll Free** 0800 220 007

Web: www.brooks.com.au (Aus) www.brooks.co.nz (NZ)

E & OE As our policy is one of continuous product development, we reserve the right to alter product details without prior notice. DS4318 09/01/12

Type number	
4318	Combination heat detector

The zone line is connected to the base 2324 (A-B)
Ext. LED is connected to the base 2324 (A-L).

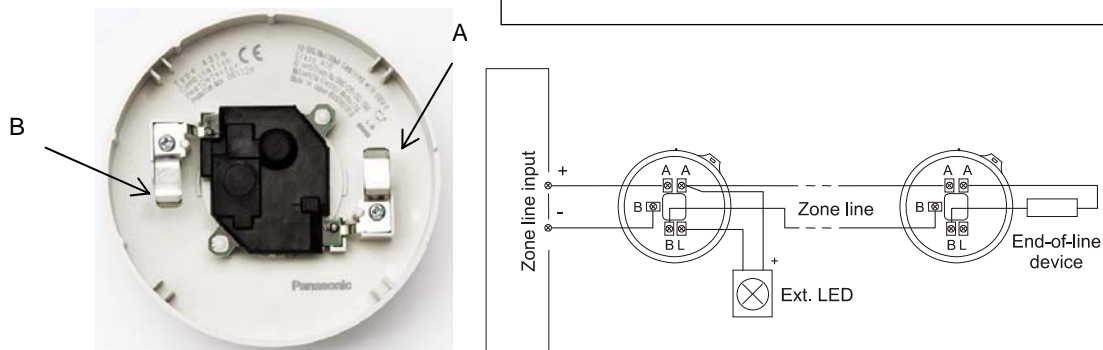

In the detector: See also "Engineering Instructions for detectors Type 435x".

- A** Contact for base 2324
- B** Contact for base 2324

The detector is plugged in a base 2324. End-of-line device depending on the zone line input.

Technical data	
Voltage (V DC) rated allowed normal	24 10-30 24
Current consumption at nom. volt. (mA) quiescent (detector only) active (detector only)	For more details see Firetracker 512 & Firetracker 128 Planning Instructions. 0.015 min. 3
Ambient temperature (°C) operating storage	-10 to +50 -25 to +70
Application temperature class A1 (°C) typical / max.	+25 / +50
Ambient humidity (% RH)	max. 95, non condensing
Ingress Protection rating (estimated)	IP51
Alarm temp. (T=°C; $\Delta T = ^\circ\text{C}/168\text{s}$)	59; 18 (T=static response temp. Class A1 $T^{\text{min}}=54$; $T^{\text{max}}=65$.)
Size \varnothing x h (mm)	102 x 39
Weight (g)	54
Construction / Colour	Modified polycarbonate / Grey (N8, Muncell colour code)
Approvals	CE 07 EC Certificate no. 0845-CPD-232.1566; EN54-5, class A1R. AS7240.5.



Panasonic
Fire System Technology

Australia Head Office: 4 Pike Street Rydalmere NSW 2116
Ph+61 2 9684 1466 **Fx**+61 2 9684 4146 **Toll Free** 1300 78 FIRE

New Zealand Unit 106, The Zone, 23 Edwin Street Mount Eden 1024
Ph+64 9 638 4644 **Fx**+64 9 6384645 **Toll Free** 0800 220 007

Web: www.brooks.com.au (Aus) www.brooks.co.nz (NZ)

E & OE As our policy is one of continuous product development, we reserve the right to alter product details without prior notice. DS4318 09/01/12

Sydney - Melbourne - Adelaide - Brisbane - Perth - Hobart - Darwin - New Zealand
fire products and solutions